



1形・2形 六角袋ナット

ねじの呼び(d)	m1		m3	A'	T1	R	S	b1	b2	g	r
	基準寸法	許容差	基準寸法	最小	最小	約	基準寸法	最小	基準寸法	約	約
M4	9.5	±0.25	3.2	5.6	0.5	3	7	4	3.2	2	0.5
M5	11	±0.25	4	6.6	0.5	3.5	8	5	4	2	0.5
M6	12	±0.25	5	8.5	0.5	4.5	10	6	5	2.5	0.5
M8	15	±0.3	6.5	11.5	0.5	6.5	13	8	6.5	3	0.5
M10	18	±0.3	8	14.5	0.5	7.5	17	10	8	3.5	0.5
M12	22	±0.3	10	16.5	1.0	8.0	19	12	10	4	1.0
M16	28	±0.4	13	21.5	1.0	11	24	16	13	5	1.0
M20	34	±0.4	16	26.5	1.0	13.5	30	20	16	6	1.0
M24	41	±0.4	19	32.5	1.0	16.5	36	24	19	8	1.0
M30	50	±0.5	24	41.5	1.0	21	46	30	24	9	1.5
M36	59	±0.5	29	50.5	1.0	25.5	55	36	29	10	1.5

1形

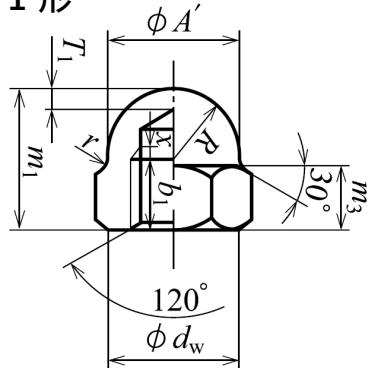

2形

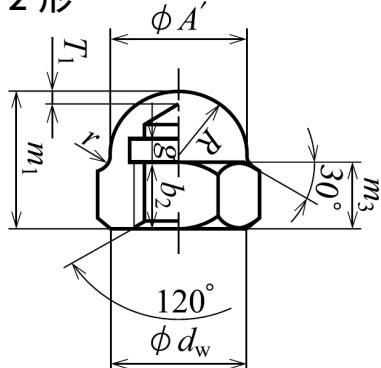

単位 : mm


六角袋ナット

1形は六角部とキャップ部が一体型で逃げ溝のないもの、2形は六角部とキャップ部が一体型で逃げ溝のあるもの。3形は六角部とキャップ部とを溶接したものとする。



3形2種 六角袋ナット

ねじの呼び び (d)	m2		m3	A'	T2	R	S
	基準寸法	許容差	基準寸法	最小	最小	約	
M3	4.8	±0.25	2.4	4.6	0.4	2.3	5.5
M4	6.2	±0.25	3.2	5.6	0.4	3	7
M5	7.5	±0.25	4	6.6	0.4	3.5	8
M6	9.5	±0.25	5	8.5	0.5	4.5	10
M8	12.5	±0.3	6.5	11.5	0.5	6.5	13
M10	15.5	±0.3	8	14.5	0.7	7.5	17
M12	18.5	±0.3	10	16.5	0.8	8.0	19
M16	24	±0.4	13	21.5	1.0	11	24
M20	29	±0.4	16	26.5	1.2	13.5	30
M24	35.5	±0.4	19	32.5	1.2	16.5	36
M30	45	±0.5	24	41.5	1.2	21	46
M36	54.5	±0.5	29	50.5	1.6	25.5	55

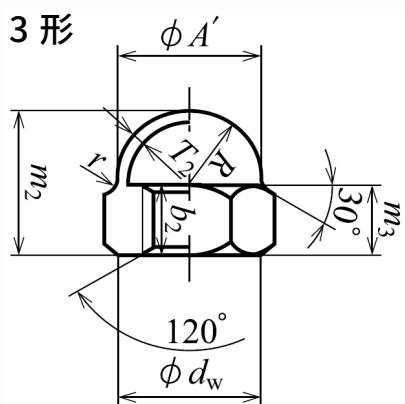

単位 : mm

詳細・お問い合わせは下記まで

www.fukuronut.com

